
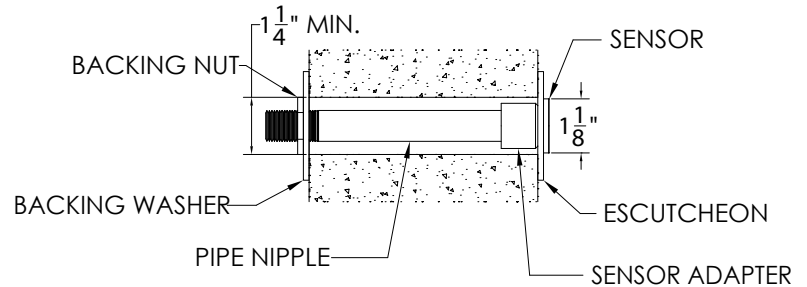


Core Drill Assembly

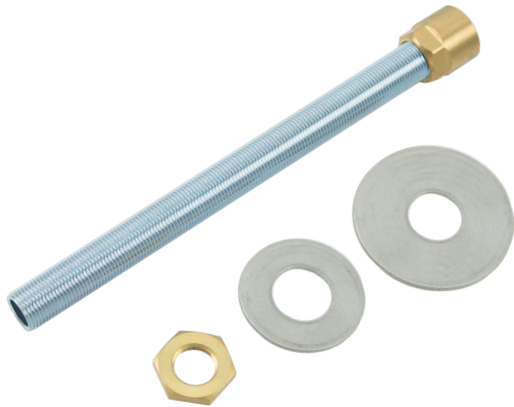

Part No. 100089

► Description

I-CON's Core Drill Assembly is used when there is no access to the rear of the fixture from the chase area or when controlling a water closet fixture set by itself. When retrofitting older style lavatory valves, the unit can be used to secure the fixture to the wall when the older lavatory valve and push buttons are removed.

► Pipe Nipple Length (choose one)

- ☐ 1" (100089 : 1") ☐ 2" (100089 : 2") ☐ 4" (100089 : 4")
☐ 5" (100089 : 5") ☐ 6" (100089 : 6") ☐ 8" (100089 : 8")
☐ 9" (100089 : 9") ☐ 10" (100089 : 10") ☐ 12" (100089 : 12")

► Escutcheon Diameter (choose one)

- ☐ 2-3/8" (100095 : 2-3/8" : 7/8") ☐ 2-7/8" (100095 : 2-7/8" : 7/8")
☐ 4" (100095 : 4" : 7/8") ☐ 6" (100095 : 6" : 7/8")

► Backing Support (choose one)

- ☐ 2" Backing Washer (100095 : 2 : 7/8")
☐ 7-3/4" Wide Backing Bar (100097)

► Backing Nut

- ☐ Backing Nut (100094)

► Sensor Adapter

- ☐ Sensor Adapter (100326)

► Accessories

See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



Specifications

- All corrosion-resistant materials
- Part numbers vary according to application and wall thickness

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.