


TruFIRE® Model 24VAC High Flow Solenoids

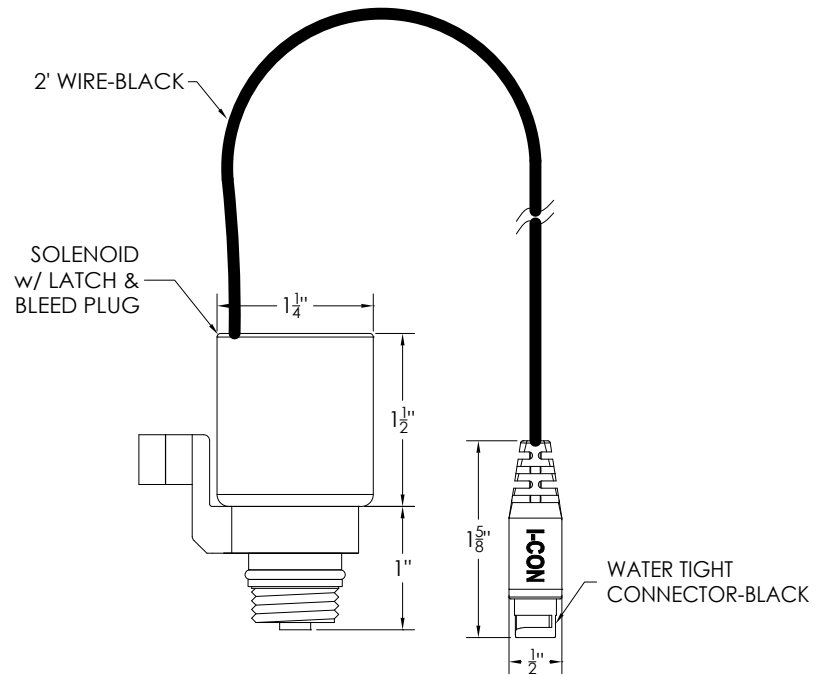

Part No. 100137 : HF

► **Description**

The I-CON TruFIRE® 24VAC High Flow Solenoid is designed for use where high water flow for lavatories or showers is required and will attach to and operate any of the I-CON flush valves, lavatory valves, shower valves, and retrofit cartridges.

► **High Flow** (choose one)

- with No Extension (Extension Required for Use)
- 6' Extension
- 15' Extension
- 25' Extension
- 35' Extension
- 60' Extension


► **Accessories**

See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



Specifications

- Voltage - 24VAC 50/60Hz
- Inrush Current - 0.25 AMP
- Holding Current - 0.18 AMP
- Closing Type - Slow Closing with Soft Close Feature
- Sealing Surface - EPDM
- Max. Operating Pressure - 100 PSI
- Min. Operating Pressure - Positive Close
- Max. Fluid Temperature - 120°F

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.