


COBALT Pro® Wall Sensor Concealed Flush Valve Retrofit Kit

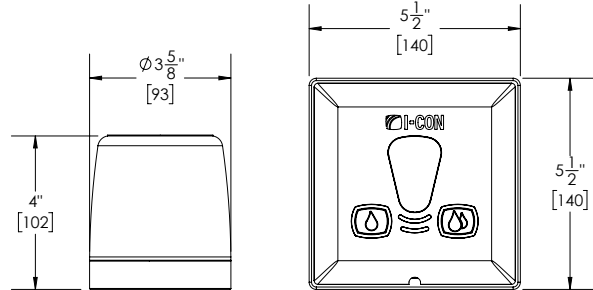

Part No. 101674

► **Description**

COBALT Pro® Wall Sensor Concealed Flush Valve Retrofit Kit. Includes a wall sensor, cap assembly, interface module, ProLAST® T-Seal, and actuator opening cover.

► **Features**

- Patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE overmolded seals, and a stainless steel, integral bypass filter
- TPE overmolded seals are chlorine and chloramine resistant to prevent failure in the worst water conditions
- Dynamic sealing design provides accurate and consistent flush performance over time
- TruFLUSH® volume control uses live water pressure data to maintain desired flush volumes
- All water closets use the same ProLAST® T-Seal for easy maintenance
- All urinals use the same ProLAST® T-Seal for easy maintenance
- On-board usage tracking, battery monitoring, and obstruction monitoring with alerts
- Automatic sensor range adjustment
- ADA compliant sensor activation and override buttons
- No external flush volume adjustment
- Includes a wall sensor, cap assembly, interface module, ProLAST® T-Seal, and actuator opening cover

► **Power Supply**

- Plug-in Transformer 100476
(sold separately, can power up to two wall sensor flush valves)

► **Accessories**

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



► **Flush Volume (must select one)**

Urinal Flush Volume

- 0.125 gpf / 0.5 Lpf
- 0.25 gpf / 1.0 Lpf
- 0.5 gpf / 1.9 Lpf
- 1.0 gpf / 3.8 Lpf

Water Closet Flush Volume

- 1.1 gpf / 4.2 Lpf
- 1.28 gpf / 4.8 Lpf
- 1.6 gpf / 6.0 Lpf
- 2.4 gpf / 9.0 Lpf
- 3.5 gpf / 13.2 Lpf

► **Retrofit Kit (choose one)**

- Zurn®
- Sloan®

Recommended Specification

COBALT Pro® Wall Sensor Concealed Flush Valve Retrofit Kit utilizes the I-CON patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE overmolded seals, and a stainless steel, integral bypass filter. The TruFLUSH® volume control uses live water pressure data to maintain desired flush volumes. ADA compliant sensor activation and override buttons. The retrofit kit includes a wall sensor, cap assembly, interface module, ProLAST® T-Seal, and actuator opening cover.

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.