


COBALT® Secure Concealed Sensor Flush Valve for NEXUS® Controllers

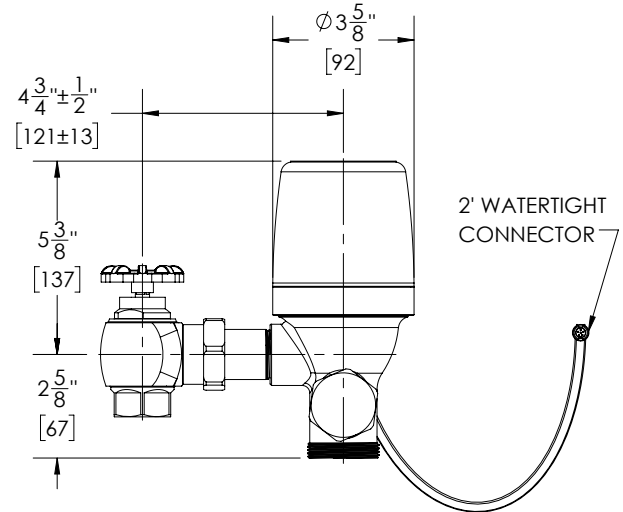

Part No. 101826 : 3205

► Description

COBALT® Secure Concealed Sensor Flush Valve for NEXUS® Controllers for Water Closets and Urinals; No Vacuum Breaker

► Features

- Patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE overmolded seals, and a stainless steel, integral bypass filter
- TPE overmolded seals are chlorine and chloramine resistant, to prevent failure in the worst water conditions
- Dynamic sealing design provides accurate and consistent flush performance over time
- All water closets use the same ProLAST® T-Seal for easy maintenance
- All urinals use the same ProLAST® T-Seal for easy maintenance
- Solenoid lead with watertight connector
- Adjustable tailpiece allows for variations in rough-in
- Wheel handle adjustable, back-flow preventing control stop

► Solenoid Type (must select one)

- 24VAC (For use with Standard NEXUS® I-CON Controllers)
- 9VDC (For use with Battery Powered NEXUS® I-CON Controllers)

► Accessories

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



► Flush Volume (must select one)

- | | |
|---|---|
| <input type="checkbox"/> 0.125 gpf / 0.5 Lpf - Urinals Only | <input type="checkbox"/> 1.28 gpf / 4.8 Lpf |
| <input type="checkbox"/> 0.25 gpf / 1.0 Lpf - Urinals Only | <input type="checkbox"/> 1.6 gpf / 6.0 Lpf |
| <input type="checkbox"/> 0.5 gpf / 1.9 Lpf - Urinals Only | <input type="checkbox"/> 2.4 gpf / 9.0 Lpf |
| <input type="checkbox"/> 1.0 gpf / 3.8 Lpf - Urinals Only | <input type="checkbox"/> 3.5 gpf / 13.2 Lpf |
| <input type="checkbox"/> 1.1 gpf / 4.2 Lpf | |

Recommended Specification

I-CON COBALT® Secure 101826 Concealed Sensor Flush Valve for NEXUS® Controllers is a sensor operated, dynamic sealing, concealed flush valve for water closets and urinals operated by a NEXUS® controller. The valve body is cast brass with a rough exterior finish. It utilizes the I-CON patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE over-molded seals, and a stainless steel integral bypass filter. It includes a backflow-preventing control stop with a wheel handle.

* battery life depends on usage, operating conditions, and storage conditions

IMPORTANT NOTE: Do not use abrasive or chemical cleaners and do not pressure wash valves.

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.