


NEXUS® Model 1 I/O DC Battery Powered Controller

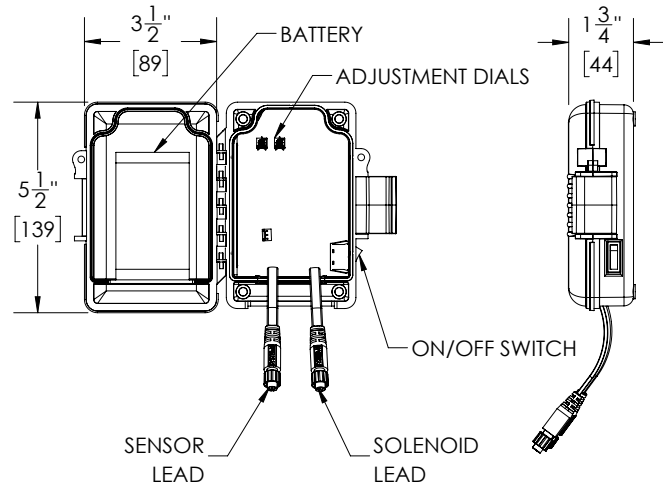

Part No. 101949

► **Description**

9VDC standalone electronic controller used to control a single shower, watercloset, or lavatory valve. Potentiometers allow for field adjustable lockout and runtime.

► **Program Type** (choose one)

- One Cold
- One Flush
- One Hot
- One Shower
- Special Order - Please Contact Factory

Port # 1
(C)
(F)
(H)
(S)

► **Timing Adjustment Option** (choose one)

- Standard - Field Adjustable Lockout & Runtime
- Custom - Please Contact Factory


► **Accessories**

See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

Specifications

- Water Resistant Enclosure
- Specifically designed for penal use and other vandal prone areas to conserve potable water consumption
- 2ft watertight leads for solenoid and sensor connection
- UL Listed (E308296) and independently tested
- Power switch on the exterior of the housing
- Standard or high pressure option switch
- 10 year battery life* (approximately 250,000 cycles)

*actual battery life depends on usage, operating conditions and storage conditions.

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.