


## ZEPHYR® Model Pneumatic Retrofit Block

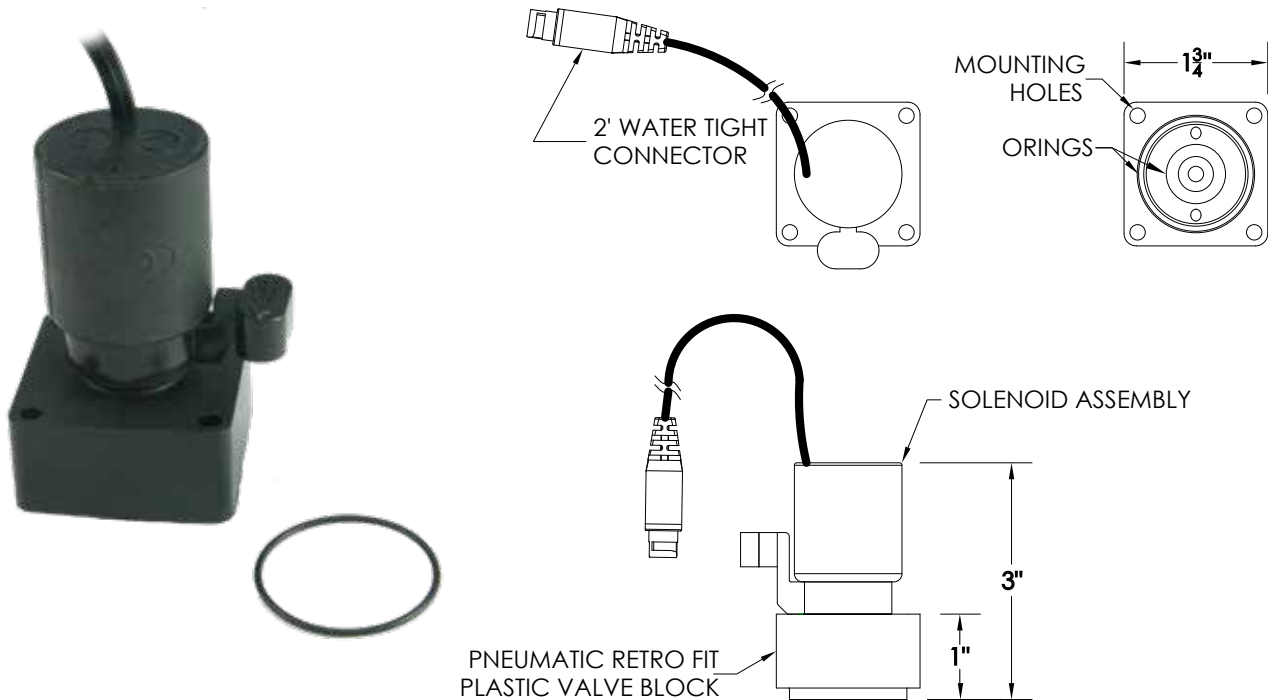

Part No. 100228

### ► **Description**

Pneumatic Retrofit Block easily converts existing pneumatic valves to low voltage, electronically controlled systems. The VLV-CMN-2190 replaces Acorn, Metcraft, and Willoughby pneumatic servomotors while the VLV-CMN-2191 replaces older style Bradley pneumatic servomotors.

### ► **Available Options** (choose one)

- 1-3/4" Block w/ 24VAC TruFIRE™ Solenoid
- 1-3/4" Block w/ 9VDC TruFIRE™ Solenoid
- 2" Block w/ 24VAC TruFIRE™ Solenoid
- 2" Block w/ 9VDC TruFIRE™ Solenoid

### ► **Solenoid Power** (choose one)

- 24 Volts AC
- 9 Volts DC (Battery Operated)


### ► **Accessories**

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.



### **Specifications**

- Expandable valve solution allowing for one (1) pre-temperd water supply for up to three (3) shower valves
- No metering diaphragms to fail and clog
- Engineered non-metallic valve body made from Delrin for advanced corrosion resistance
- Ability to activate using manual by-pass handle
- Advanced design allows for 1.5 GPM shower saving water over 2 GPM shower units
- All solenoid are interchangeable with other I-CON valves reducing spare parts
- Maximum water temperature of 120 degrees F and maximum pressure of 100 PSI

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

This space is for Architect/Engineer approval

The information contained in this document is subject to change without notice.