
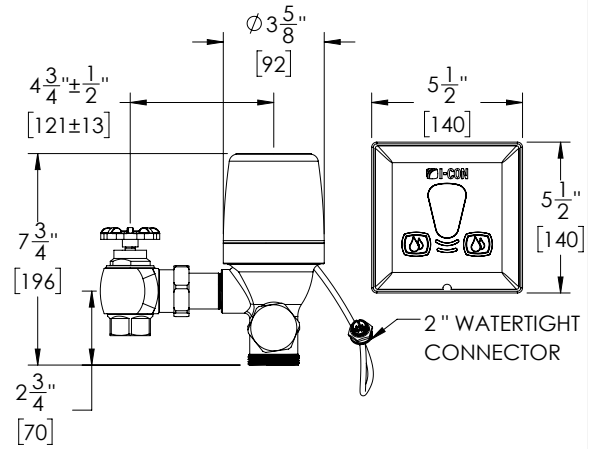


**COBALT Pro® Wall Sensor
Concealed Flush Valve for Urinals**

0.125 gpf / 0.5 Lpf

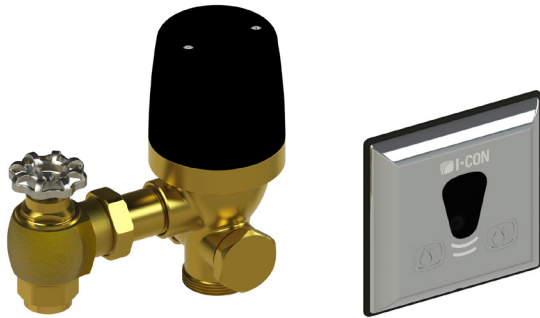

Part No. 101929 : 3205 : 0.125

► **Description**

COBALT Pro® Wall Sensor Concealed Flush Valve for Urinals; 0.125 gpf / 0.5 Lpf; Less Vacuum Breaker

► **Features**

- 0.125 gpf / 0.5 Lpf
- Patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE overmolded seals, and a stainless steel, integral bypass filter
- TPE overmolded seals are chlorine and chloramine resistant to prevent failure in the worst water conditions
- Dynamic sealing design provides accurate and consistent flush performance over time
- TruFLUSH® volume control uses live water pressure data to maintain desired flush volumes
- All urinals use the same ProLAST® T-Seal for easy maintenance
- On-board usage tracking, battery monitoring, and obstruction monitoring with alerts
- Automatic sensor range adjustment
- ADA compliant sensor activation and override buttons
- No external flush volume adjustment
- Adjustable tailpiece allows for variations in rough-in

► **Power Supply**

- Plug-in Transformer 100476
(sold separately, can power up to two wall sensor flush valves)

► **Accessories**

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

► **Urinal Flush Volume**

0.125 gpf / 0.5 Lpf

► **Control Stop**

- 3/4" I.P.S. Control Stop
- 1" I.P.S. Control Stop

Recommended Specification

I-CON COBALT Pro® 101929 3205 Flush Valve is a wall sensor operated, dynamic sealing concealed flush valve for urinals. The valve body is cast brass with a rough exterior finish. It utilizes the I-CON patented ProLAST® T-Seal, featuring a single-piece design, glass-reinforced polymer substrate with TPE overmolded seals, and a stainless steel, integral bypass filter. The TruFLUSH® volume control uses live water pressure data to maintain desired flush volumes. ADA compliant sensor activation and override buttons. The flush volume is 0.125 gpf / 0.5 Lpf.

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.