


KIT INCLUDES

- COBALT Pro® Sensor Cap
- Square-Profile O-Ring
- ProLAST® T-Seal
- Actuator Opening Cover



TOOLS NEEDED

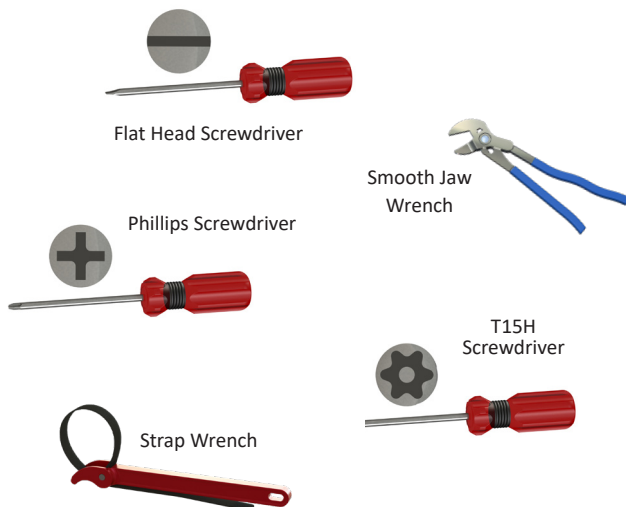

PRIOR TO INSTALLATION

- All plumbing should be installed according to applicable state and local codes and regulations.
 - Before installation of the I-CON flush valve, ensure the water closet or urinal fixture, drain line, and water supply line are properly installed.
 - Water supply lines must be sized to allow for appropriate water flow for each fixture.
 - Flush all water supply lines of any debris before making any connections.
 - Do not use pipe sealant or plumbing grease on any components or couplings, with the exception of the control stop inlet.
 - A smooth jaw or strap wrench should be used for installation to prevent damage to the finish of the I-CON flush valve and components.
 - Check to ensure the “L” dimension specified on the flush valve packaging is correct for your application. “L” Dimension formula is provided below.
“L” Dimension = Wall Thickness (to the nearest whole inch) + 2-3/4”
- The I-CON flush valve is designed to operate at water pressures ranging from 15 to 100psi (103 to 689kPa). The fixture type determines the minimum pressure required for the valve. Most low-consumption water closets are designed to operate with a minimum flowing water pressure of 25psi (172kPa).

LIMITED WARRANTY

I-CON Systems (I-CON) warrants that its commercial manufactured products are made of first-class materials, are free from defects, and are made to withstand normal use when installed properly. Products have the following warranty periods: 3 years for COBALT®, COBALT Pro®, and COBALT Connect® faucets and flush valves and I-CON EDGE® gateways. 1 year for all other products and decorative finishes. The warranty period begins on the date of purchase.

Products should be sent to I-CON at the customer’s expense. I-CON will take a reasonable amount of time to determine if the product is defective and whether it will be repaired or replaced. During the warranty period, items will either be (1) repaired at no charge using new replacement parts or (2) replaced with either a new similar product or one manufactured from new or serviceable used parts that are, at minimum a functional equivalent to the original. The course of action will be determined at I-CON’s discretion. Replacement products that are installed according to the instructions provided by I-CON will assume the remaining warranty of the original product. The limited warranty is only applicable to the product’s materials and workmanship. No claims for labor, transportation, or other incidental or consequential costs will be allowed. No extended warranties are available. THE SOLE AND EXCLUSIVE REMEDY FOR ANY DEFECTIVE PRODUCT IS LIMITED TO REPAIRING OR REPLACING THE DEFECTIVE PRODUCT. Before installing and using products, the purchaser is responsible for determining the products’ suitability and assumes all risks and liabilities related to the product.

This warranty only applies to persons and organizations that purchase I-CON products directly from I-CON or an authorized I-CON representative for the purpose of resale. This warranty does not apply to the life of batteries or other consumables.

EXISTING COMPONENT REMOVAL

Step 1

Remove control stop cap.



Step 2

Turn adjustment screw **CLOCKWISE** to close control stop.

Step 3

Activate flush valve to relieve water pressure.



Step 4

Use strap wrench to remove flush valve cap. Remove actuator assembly and all inner components. Inner components commonly include a diaphragm, trip mechanism, and plastic internal cap.



Step 5

Install the actuator cover on flush valve body.



BATTERY INSTALLATION


Step 1

Remove screws from top of control module assembly. Remove cover.



Step 2

To remove battery module from control module, squeeze locking tabs and lift upwards.

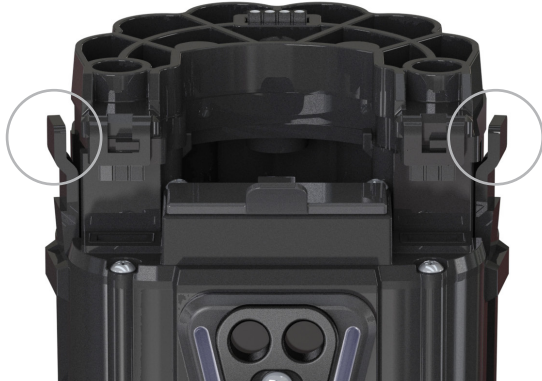

Step 3

Remove screw and battery cover. Insert six (6) new AA batteries following polarization markings. Reinstall battery cover and tighten screw. **NOTE:** Only use alkaline batteries of same brand and age.



Step 4

Reinstall battery pack onto control module.



ProLAST® T-SEAL & CONTROL MODULE INSTALLATION

Step 1

Insert ProLAST® T-Seal into flush valve body.




Step 2

Place square-profile O-ring into groove on bottom of control module assembly. Place control module assembly onto flush valve body with front facing directly towards user.




Step 3

Tighten locking ring by hand to flush valve body. Ensure control module assembly orientation has not changed.

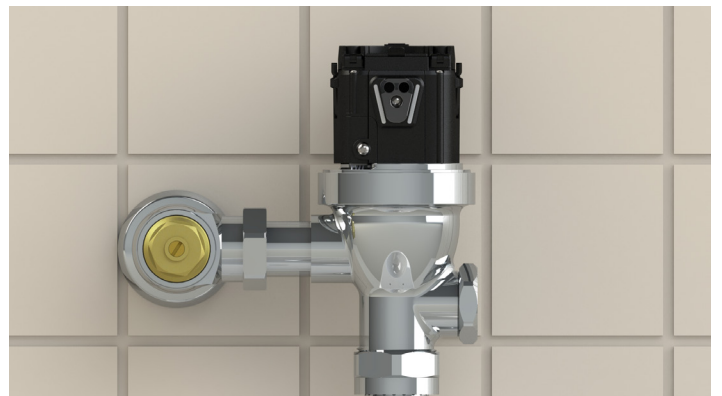

Step 4

Reinstall cover onto control module assembly. Insert screws and tighten by hand.

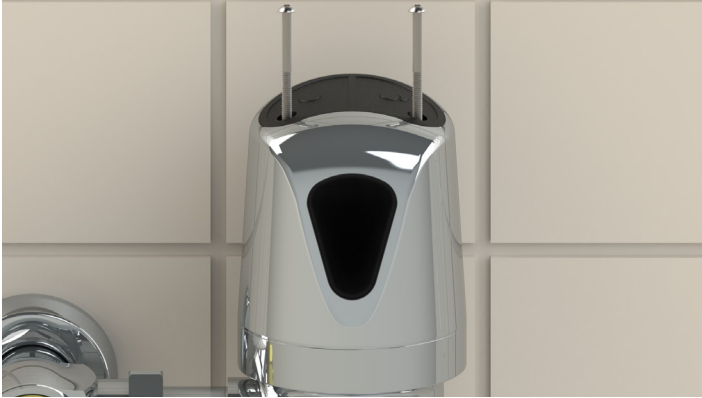

ADJUSTING CONTROL STOP

Step 1

Turn adjustment screw **COUNTERCLOCKWISE** 1/2 turn from closed position. Activate flush valve.



Step 2

To adjust flush valve, turn adjustment screw in small increments. Activate flush valve after each adjustment. The proper flow rate should completely cleanse fixture without splashing water outside of fixture.

NOTE: The flow from the valve must never exceed the flow capacity of the fixture. If a valve failure should occur, the fixture must be able to accommodate a continuous flow from the valve.



Step 3

Reinstall control stop cap.




CONTROL MODULE SETUP

NOTE: When powered and cover is removed, control module automatically enters maintenance mode. While maintenance mode is active, a solid green light indicates a user is detected. Control module exits maintenance mode when cover is replaced or after 30 minutes. To re-enter maintenance mode, press any quick action button.



QUICK ACTION BUTTON DIAGRAM

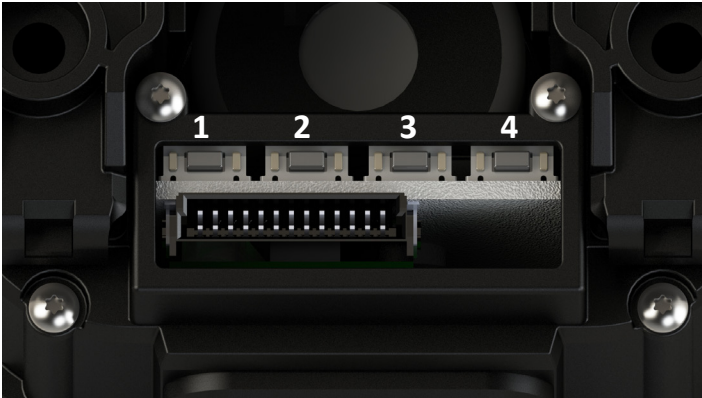

- 1) Auto Range Quick Action Button
- 2) Profile Selection Quick Action Button
- 3) Activate Quick Action Button
- 4) Flush Count Reset Quick Action Button

AUTO-RANGE

To view current profile, press and release profile quick action button. Current profile number is displayed by number of illuminated blue rows. To change profile, press and release profile quick action button while current profile is displayed. Continue to press and release profile quick action button until desired profile is displayed. Press and hold profile quick action button for 3 seconds to set profile. Blue lights will flash to indicate profile was saved.




NOTE: Test range with targets of various colors and textures for accuracy. Ensure foreign objects, such as stall doors and mirrors are not detected.

PROFILE

To view current profile, press and release profile quick action button. Current profile number is displayed through LED illuminations. To change profile, press and release profile quick action button again. Continue to press and release profile quick action button until desired profile is displayed. Press and hold profile quick action button for 3 seconds to set profile. LED lights will flash to indicate profile was saved.

| LED Display | Profile | Water Savings |
|----------------|-----------|---------------|
| Red and Blue | Profile 1 | 10% |
| Blue | Profile 2 | 5% |
| Green and Blue | Profile 3 | 0% |

Profile 1: Red and Blue Lights, 10% Water Savings

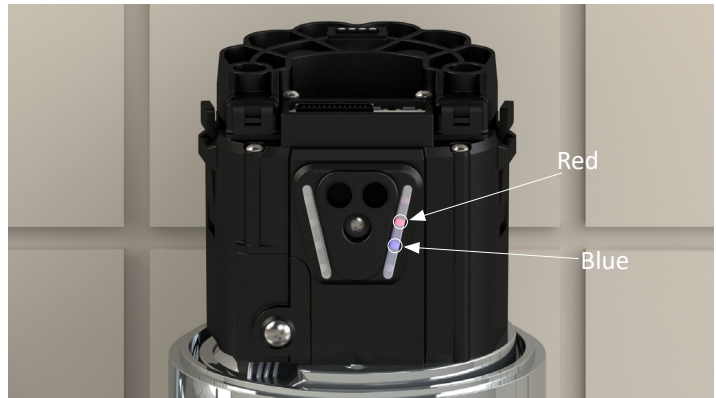

Profile 2: Blue Light, 5% Water Savings



Profile 3: Green and Blue Lights, Standard Flush Volume



ACTIVATION

Activates the valve without the cover installed.

ACTIVATION COUNT RESET

The activation count can be monitored using a programmer (sold separately). A red LED blinking alarm will begin once the activation count has surpassed 250,000 cycles. At this time, it is recommended to rebuild the valve. To reset this alarm, press and hold the activation count reset for 5 seconds. The red LED will flash indicating the count has been reset to 0.

INSTALLATION COMPLETE

CARE OF SURFACES

Do not use commercial cleaning compounds to clean flush valve. Abrasive or chemical cleaners may dull the luster and attack finishes. Use mild soap and water and then dry with a clean nonabrasive cloth or towel. A microfiber cloth is recommended. Protect flush valve from any splattering when cleaning the floor, tile, or fixtures. **DO NOT USE ACID OR ALCOHOL BASED CLEANERS.**